



TAG ALONG TRAILERS

TANDEM/TRIDEM, 2 + 1 (LIFT STEER AXLE), 3 + 1* (AXLE LIFT or LIFT STEER AXLE)





gincor.com

The GINCOR Werx JC-Series trailer design holds a proven track record of over 40 years of excellence. Our trailers offer structural loading capacities that match or exceed those of our competitors, demonstrating our commitment to strength and reliability. Our long-term success comes from meeting customer needs and delivering a premium product.

GINCOR Werx JC-Series Trailers are engineered to meet your operational needs.

Contact your local sales manager for further details.

* 3 + 1 axle lift or lift steer axle is non SPIF compliant
non conforming - not recommended for Ontario - Canada

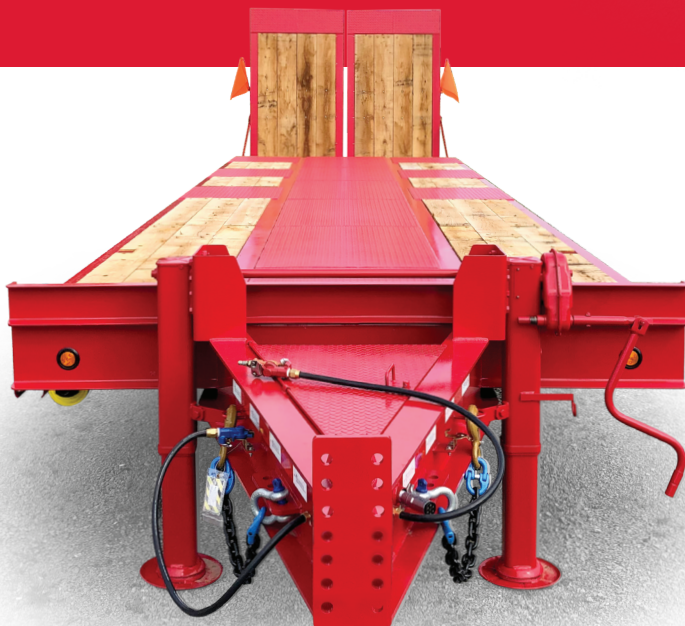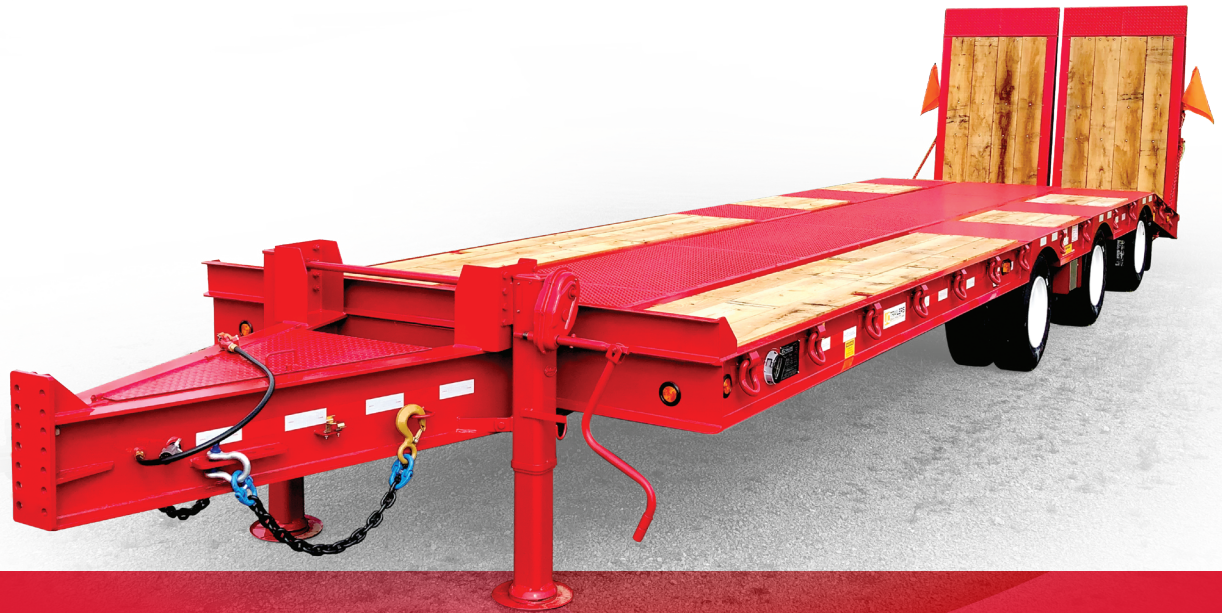

OPTIONS

- Paver or construction style
- Over width 9' and 9' 6"
- Manual or air tilt deck
- Flat Deck
- Drive on beaver tail
- Air Suspension
- Lift axle kit (non-conforming)
- Axle spread 49" 60" 72"
- Aluminum rims
- Outriggers
- Winch track and winches
- Galvanized finish
- Air ramp





TAG ALONG TRAILERS

TANDEM/TRIDEM, 2 + 1 (LIFT STEER AXLE), 3 + 1* (AXLE LIFT or LIFT STEER AXLE)

gincor.com
info@gincor.com
(519) 676 7900



Dimensions	
Overall length up to 41'	Optional
8'-6" to 9'-6" Wide	Optional
34" deck height (loaded)	Standard
6' Tongue	Standard
Construction	
Main beams 12" heavy duty I beam (wide flange)	Standard
Steer axle models come with T1 100 KSI Yeld steel chassis beams	Standard
Cross members 6" channel	Standard
Tow Eye	
SAF Holland DB-100	Standard
Adjustable (24"/28"/32")	Standard
Landing Gear	
Dual 60,000lbs with 2 speed gear box	Standard

Storage	
Storage box with lockable lid in tongue	Standard
Woven wire mess between landing gear for dunnage	Standard
Decking	
2-1/4" Oak decking & 1/4" checker plate wheel wells covers	Standard
Beavertail	
5' with manual ramps	Standard
Primary Suspension	
HD spring suspension 6.5" ride height	Standard
Axles	
25,000 lbs	Standard
8 bolt piloted hubs tapered spindles and bearings	Standard
Brakes	
Air with 30/30 chambers	Standard
12.25 x 7.5 auto slacks and outboard drums	Standard

Tires	
235/75 R 17.5	Standard
Wheels	
Eight bolt 6.75 x 17.5 steel white	Standard
ABS	
2S1M	Standard
Securement	
Standard 1" "D" rings	Standard
Electrical	
Grote ultra blue sealed wire harness	Standard
Lighting	
LED lighting	Standard
Surface Preparation	
Commercial sand blast	Standard
Paint	
Two part epoxy primer, polyurethane finish	Standard



GINCOR Werx JC-Series Trailers are SPIF compliant.

This literature is for illustrative purposes only. Some standard features and options may not be exactly as shown or reflective of your geographic region of operation. Consult your GINCOR Werx representative for details. Specifications are subject to change without notice.

GTW-TA 03/2025 NA

* 3 + 1 axle lift or lift steer axle is non SPIF compliant
non conforming - not recommended for Ontario - Canada

